
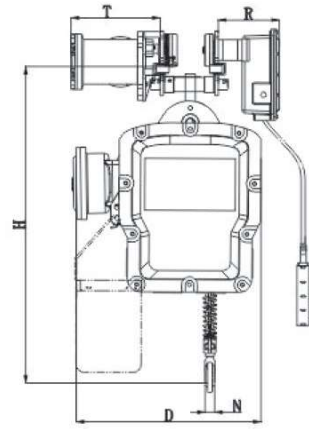


TECHNICAL PARAMETERS

Product Code	Capacity	Standard Lifting Height	Lifting Speed	Lifting Motor		Trolley Motor			Phases	Voltage	Frequency	I-Beam
				Power	Rotation Speed	Power	Rotation Speed	Rotation Speed				
	(Tonnes)	(Mtr)	(Mtr /min)	(KW)	(r/min)	(KW)	(r/min)	(r/min)		(V)	(Hz/s)	(mm)
KCHEP0101	1	3/9	6.6	1.5	1440	0.4	1440	11/21	3	380	50	58-153
KCHEP01501	1.5	3/9	8.8	3.0	1440	0.4	1440	11/21	3	380	50	82-178
KCHEP0201	2	3/9	6.6	3.0	1440	0.4	1440	11/21	3	380	50	82-178
KCHEP0202	2	3/9	3.3	1.5	1440	0.4	1440	11/21	3	380	50	82-178
KCHEP025001	2.5	3/9	5.4	3.0	1440	0.75	1440	11/21	3	380	50	100-178
KCHEP0301	3	3/9	5.4	3.0	1440	0.75	1440	11/21	3	380	50	100-178
KCHEP0302	3	3/9	4.4	3.0	1440	0.75	1440	11/21	3	380	50	100-178
KCHEP0303	3	3/9	2.2	1.5	1440	0.75	1440	11/21	3	380	50	100-178
KCHEP0502	5	3/9	2.7	3.0	1440	0.75	1440	11/21	3	380	50	100-178

Product Code	Capacity	Major Dimensions In mm (Approximate)													Chain
	(Tonnes)	H	A	B	D	E	I	K	L	N	W	U	R	T	
KCHEP0101	1	650	600	340	400	165	Ø31	Ø42	32	24	206	111	142	231	Ø6.3
KCHEP01501	1.5	770	700	390	450	265	Ø36	Ø49	40	30	237	127	142	231	Ø10.0
KCHEP0201	2	770	700	390	450	265	Ø36	Ø49	40	30	237	127	142	231	Ø10.0
KCHEP0202	2	815	600	340	400	236	Ø36	Ø49	40	30	237	127	142	231	Ø7.1
KCHEP025001	2.5	830	700	390	450	265	Ø43	Ø59	48	35	265	140	142	231	Ø11.2
KCHEP0301	3	830	700	390	450	265	Ø43	Ø59	48	35	265	140	142	231	Ø11.2
KCHEP0302	3	930	700	390	450	320	Ø43	Ø59	48	35	265	140	142	231	Ø10.0
KCHEP0303	3	940	600	340	400	205	Ø43	Ø59	48	35	265	140	142	231	Ø7.1
KCHEP0502	5	1015	700	390	450	325	Ø43	Ø60	48	43	296	156	142	231	Ø11.2

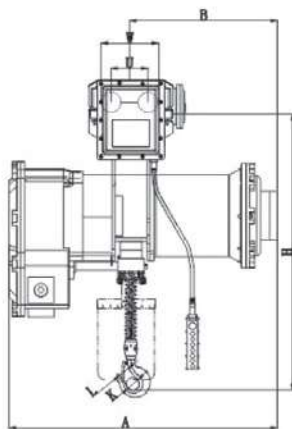

TECHNICAL PARAMETERS

Product Code	Capacity	Standard Lifting Height	Lifting Speed	Lifting Motor		Trolley Motor			Phases	Voltage	Frequency	I-Beam
				Power	Rotation Speed	Power	Rotation Speed	Rotation Speed				
	(Tonnes)	(Mtr)	(Mtr /min)	(KW)	(r/min)	(KW)	(r/min)	(r/min)		(V)	(Hz/s)	(mm)
KCHEP07503	7.5	3/9	1.8	3.0	1440	0.75	1440	11/21	3	380	50	100-178
KCHEP1004	10	3/9	2.7	3.0 x 2	1440	/	/	/	3	380	50	/
KCHEP1004	10	3/9	2.7	3.0 x 2	1440	0.75	1440	11/21	3	380	50	150-220
KCHEP1506	15	3/9	1.8	3.0 x 2	1440	0.75 x 2	1440	11/21	3	380	50	150-220
KCHEP2008	20	3/9	1.4	3.0 x 2	1440	0.75 x 2	1440	11/21	3	380	50	150-220
KCHEP2508	25	3/9	1.3	3.0 x 2	1440	0.75 x 2	1440	11/21	3	380	50	150-220
KCHEP3010	30	3/9	1.0	3.0 x 2	1440	/	/	/	3	380	50	/
KCHEP3512	35	3/9	0.9	3.0 x 2	1440	/	/	/	3	380	50	/
KCHEP5016	50	3/9	0.6	3.0 x 2	1440	/	/	/	3	380	50	/

Product Code	Capacity	Major Dimensions In mm (Approximate)																	Chain
	(Tonnes)	H	A	B	D	E	I	J	K	L	M	N	W	U	P	Q	R	T	
KCHEP07503	7.5	1200	700	390	620	320	Ø54	Ø31	Ø85	80	85	55	295	156	230	300	230	300	Ø11.2
KCHEP1004	10	1400	800	400	/	890	Ø85	Ø80	Ø85	80	104	60	/	/	/	/	/	/	Ø11.2
KCHEP1004	10	1190	800	400	/	890	Ø70	Ø36	Ø85	80	85	55	366	191	/	/	300	230	Ø11.2
KCHEP1506	15	1310	400	400	1070	535	Ø54	Ø54	Ø120	96	88	78	/	/	926	560	230	300	Ø11.2
KCHEP2008	20	1470	800	400	1260	630	Ø70	Ø70	Ø150	115	88	95	/	/	1106	740	230	300	Ø11.2
KCHEP2508	25	1640	800	400	1260	630	Ø70	Ø70	Ø150	115	88	95	/	/	1106	740	230	300	Ø11.2
KCHEP3010	30	1640	800	400	1450	/	Ø70	Ø70	Ø150	115	93	95	/	/	1750	830	/	/	Ø11.2
KCHEP3512	35	1750	800	400	/	/	Ø100	Ø100	Ø195	140	185	140	/	/	1750	570	/	/	Ø11.2
KCHEP5016	50	1750	800	400	/	1700	Ø100	Ø100	Ø195	140	222	140	/	/	/	/	/	/	Ø11.2

